

# LUXceo®

## LED PHOTOGRAPHY LIGHT

Executive Standard: GB 7000.1-2015 GB 7000.204-2008

Q508D



**SHENZHEN DISCOVER TECHNOLOGY CO., LTD**  
Add: 4F, 4B, Haomai High-tech Park 387 Huating Rd. Dalang St. Longhua District, Shenzhen 518109 China.  
Tel: 400-6618-101 Web: www.luxceo.com

## Q508D Photography Light



Thanks for choosing our products. Please read the instruction carefully and use it according to the manual.


## Product Feature

- 30 levels for both brightness and color temperature. Up to 900 modes for the lighting.
- IR remote control function. The control distance is around 7 meters.
- Ultra bright, maximum 720 lumens. It's suitable for situation that needs supplement light.
- Built-in lithium rechargeable battery.
- With 1/4" standard nut, It can be used with tripod.
- Application: emergency lighting, photography lighting .etc.

## Packing List

- |               |                             |
|---------------|-----------------------------|
| 1 x LED Light | 1 x User Manual             |
| 1 x Remote    | 1 x Certificate of Approval |
| 1 x USB Cable | 1 x Carrying Bag            |
| 1 x Lanyards  |                             |

## Product appearance

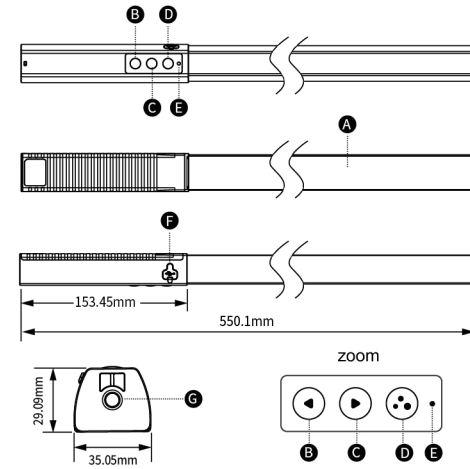

- |                             |                           |
|-----------------------------|---------------------------|
| <b>A</b> Luminous surface   | <b>B</b> CCT/Brightness - |
| <b>C</b> CCT/Brightness +   | <b>D</b> Switch           |
| <b>E</b> Charging Indicator | <b>F</b> Charging Port    |
| <b>G</b> Nut (1/4")         |                           |

## Technical Date

Name	LED photography light		
Model	Q508D		
Input	DC5V/1.5A	Power	7.2W(max)
Brightness	720LM(max)	Charging port	Micro USB
Color Temperature	3000K~6000K		
Battery	5200mAh 3.7V 19.2Wh		
Operating temperature	0~40°C		
Storage temperature	-10~50°C		


## Charging Time and Battery Life

Charging time	4-6 hours
Battery Life	4 hours for the 30 levels brightness

The above date is from testing result. Due to the diversity of the parts and influence of working temperature, the actual battery life time is not always the same as the above date.

## Remote Instruction

- Press the switch button twice into the super-brightness mode when the light is on. The mode can only last 30 minutes each time and it can be activated again after 30 minutes. Considering the lifetime of the light, please don't forced shutdown for re-entering the super-brightness mode.
- Long press to shutdown for protecting the battery when not using the light.
- Remote control distance is 7-13 meters. Please direct at the lamp cover when using the remote.
- The light can be turned off via remote when it is power-on and it can be turned on via remote again.
- Please take out the protection strip clipped in the battery before using the remote.

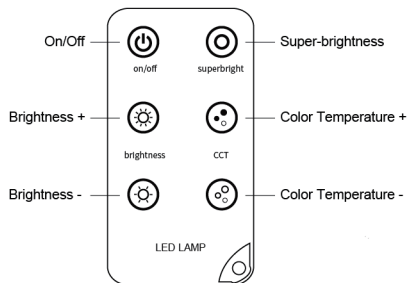

## Push-button instruction

- Short press or long press to turn on the light when it is power-off. (memory function)
- Short press on the switch button to shift the brightness mode and color temperature mode.
- Long press to shutdown. (memory function)
- Short press on the brightness button or color temperature button to increase or decrease one level. Long press on the brightness button or color temperature button to increase or decrease five levels

## Status Description

- Power-off , the lamp is in deep sleeping mode. Almost no consumer of electricity. It's suitable for the situation where the product is not used for a long time. The remote can not work under this mode.
- Turn-off, the light is on standby and remote can work. The consumer of electricity is more then 10 times by the power-off mode. It's suitable for the situation where the product is used often.
- Super-brightness, the brightness is 750LM, the color temperature is 4500. They can not be adjusted.



## Please note

- Neither put or use the lamp in high temperature or extreme environments nor exploded under strong sunlight.
- Do not throw the lamp into fire in case of the happening of fire disaster and explosion.
- Please put the lamp in where children can't reach.
- Please do not disassemble the lamp.
- Please do not shake, beat or strike the lamp.
- Please do not to use the lamp if the lamp is abnormal, such as leak or plump.
- Do not rub your eyes but wash your eyes immediately with clean water if the liquid leaked from the lamp enter your eyes, and go to the hospital when it is serious, and to contact customer service.
- It is normal that the temperature of the lamp surface increases. During or after using the lamp, please take it carefully.
- Children are not allowed to use the lamp when no adults are around.
- Please check the voltage requirements before using the lamp in case of damaging the lamp because of wrong voltage or power.
- Please charge the lamp at least once every three months.
- To avoid injury or damaging to property, please pull out the power line when not using the lamp.
- Please do not place the lamp in wet environment or water when charging.

## Customer Information

Attn: \_\_\_\_\_ Tel: \_\_\_\_\_  
Add: \_\_\_\_\_

## Product Information

Product Model: \_\_\_\_\_ Purchase Date: \_\_\_\_\_  
Product Serial Number: \_\_\_\_\_

## Product Maintenance Record

Date	Maintenance Center Name	Fault and Handling	Finish Date

## The Dealer Information

Company Name: \_\_\_\_\_ Purchase Date: \_\_\_\_\_  
Add: \_\_\_\_\_  
Signature: \_\_\_\_\_



The user to save      Lost not fill      V1.0